




GETELEC

We protect your electronics

# ENVIRONMENTAL SEALING SILICONE HOLLOW « D » PROFILE

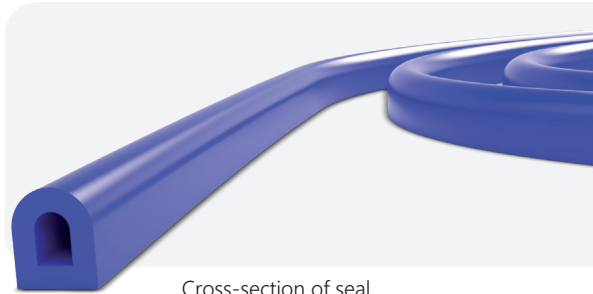


Cross-section of seal



Recommended groove dimensions  
Machining tolerance:  $\pm 0,05$

Réf.	A (mm)	B (mm)	R (mm)	Wall thickness (mm)
3931	3.92	3.00	1.96	0.80
3996	3.96	3.96	1.98	1.14
4031	3.96	3.00	2.00	0.80
4747	4.70	4.70	2.35	1.27
47047	4.75	4.75		
4948	4.80	4.80	2.40	1.30
6031	6.00	3.00		
6331	6.35	6.35	3.18	1.61
70009	7.00	9.00	3.50	1.60
70011	7.00	10.00		
70080	7.00	8.00		
7638	7.60	3.00		
7639	7.60	3.98	3.80	1.00
7979	7.90	7.90	3.95	1.57
1003	10.00	10.00		1.57
1030	10.00	3.00		
1111	11.99	10.99	6.00	2.00
1510	15.00	10.00	7.50	1.50

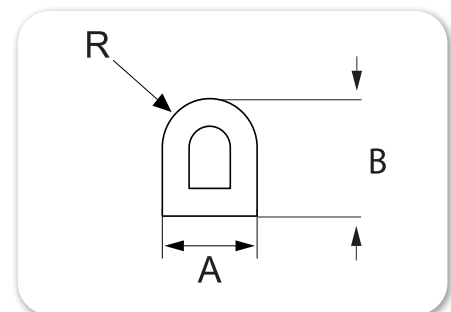

Contact us for alternative sizes

### Order example :

3931 GT67 : Profile reference + 60 shore sealing fluorosilicone