






GETELEC

We protect your electronics

ENVIRONMENTAL SEALING SILICONE HOLLOW ROUND PROFILE

Ref.	D (mm)	d (mm)	L (mm)	H (mm)	Réf.	D (mm)	d (mm)	L (mm)	H (mm)
1005	1.00	0.50	1.10	0.8	3214	3.18	1.40	3.30	2.40
1305	1.30	0.55	1.40	1.0	3211	3.20	1.10	3.60	2.40
1406	1.45	0.65	1.55	1.10	3215	3.20	1.50	3.40	2.40
1607	1.50	0.70	1.60	1.10	3217	3.20	1.70	3.40	2.20
1605	1.60	0.50	1.80	1.20	32016	3.20	1.60	3.40	2.30
1608	1.60	0.80	1.70	1.20	3202	3.20	2.00	3.40	2.10
1808	1.80	0.80	1.90	1.40	3412	3.40	1.20	3.60	2.60
1812	1.80	1.10	1.90	1.40	3420	3.40	2.00	3.50	2.50
2011	2.00	1.10	2.10	1.50	3519	3.50	1.90	3.70	2.60
2050	2.00	0.50	2.20	1.50	4013	4.00	1.30	4.20	2.80
2080	2.00	0.80	2.10	1.50	4020	4.00	2.00	4.20	2.80
2108	2.10	0.80	2.20	1.60	4520	4.50	2.00	4.70	3.40
2112	2.10	1.27	2.20	1.60	4525	4.50	2.50	4.60	3.30
2206	2.25	0.60	2.40	1.70	5023	5.00	2.30	5.20	3.80
2309	2.30	0.89	2.50	1.70	5323	5.30	2.30	5.50	4.00
2310	2.30	1.00	2.40	1.70	5535	5.50	3.50	5.70	4.10
2313	2.30	1.30	2.40	1.70	6030	6.00	3.00	6.20	4.50
2305	2.50	0.50	2.70	1.90	6004	6.00	4.00	6.10	4.40
2510	2.50	1.00	2.70	1.90	6432	6.40	3.20	6.60	4.80
2511	2.50	1.10	2.60	1.90	7034	7.00	3.40	7.20	5.30
2608	2.60	0.80	2.80	2.00	7037	7.00	3.75	7.20	5.00
2610	2.60	1.00	2.70	2.00	7837	7.85	3.75	8.00	5.90
2612	2.60	1.20	2.80	1.90	7949	7.95	4.88	8.20	6.00
2611	2.68	1.08	2.90	2.00	8061	8.00	6.00	8.20	5.60
2717	2.75	1.70	2.90	2.10	9060	9.00	6.00	9.20	6.80
2808	2.80	0.80	3.10	2.10	9563	9.50	6.40	9.70	7.10
2815	2.80	1.50	3.00	2.10	1106	11.00	6.50	11.20	8.30
30010	3.00	1.00	3.30	2.30	1206	12.00	6.00	12.20	9.00
3011	3.00	1.10	3.20	2.30	1208	12.00	8.00	12.10	8.50
3012	3.00	1.20	3.10	2.30	1209	12.00	9.00	12.00	8.40
3014	3.00	1.40	3.20	2.20	1601	16.00	15.00	16.00	10.00
3016	3.00	1.60	3.20	2.10	2813	28.00	12.50	28.00	20.00
3212	3.18	1.14	3.40	2.40	3002	30.00	20.00	30.00	22.00

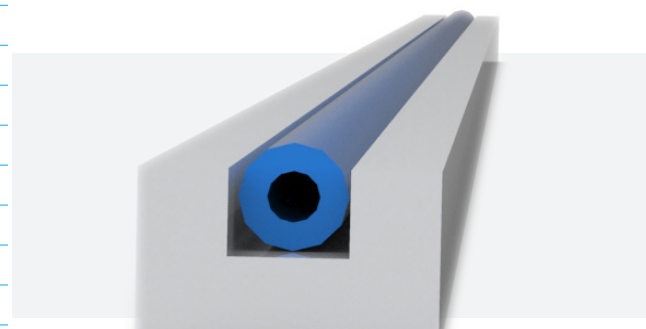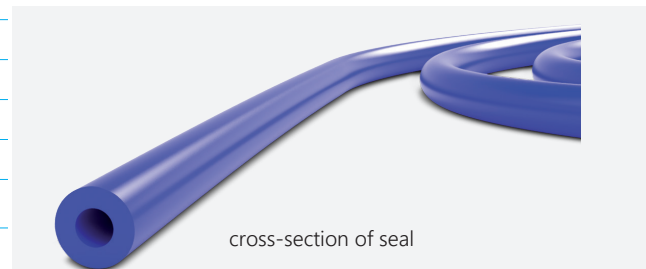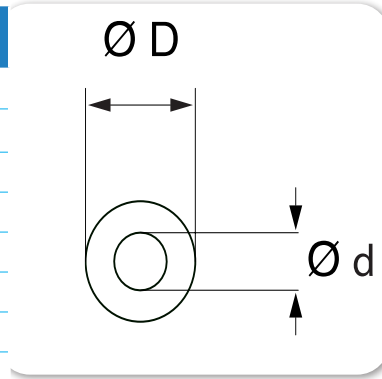

Recommended groove dimensions
Machining tolerances : ± 0,05

Contact us for alternative sizes.

Recommended groove dimensions calculation is based on the following data :

Average seal compression : 25%
Groove fill rate : 95%