



GETELEC

We protect your electronics


ENVIRONMENTAL SEALING GASKET SOLID « D » PROFILE



Cross-section of seal

Recommended groove dimensions
Machining tolerances : $\pm 0,05$

Ref.	A (mm)	B (mm)	R (mm)	L (mm)	H (mm)
1617	1.60	1.70	0.80	1.8	1.4
2022	2.00	2.20	1.00	2.3	1.9
2024	2.00	2.40	1.00	2.3	2.0
2217	2.20	1.750	1.10	2.4	1.5
2420	2.40	2.00	1.20	2.7	1.7
2713	1.30	2.70	0.65	1.6	2.3
3035	3.00	3.50	1.50	3.5	3.0
3045	3.00	4.50	1.50	3.6	3.8
3046	3.00	4.60	1.50	3.6	3.9
3060	3.00	6.00	1.50	3.6	5.1
3997	3.96	3.96	1.98	4.5	3.4
4030	3.96	3.00	1.50	4.3	2.6
4544	4.50	4.40	2.25	5.1	3.7
5040	4.00	5.00	2.00	4.7	4.3
50045	5.00	4.50	2.50	5.6	3.8
60031	6.00	3.00	3.00	6.0	2.6

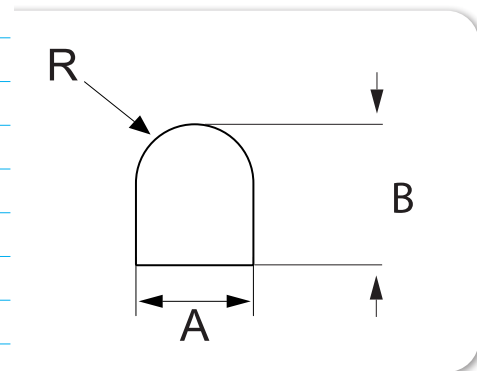

Contact us for alternative sizes.

Order example :

1617 GT60 : profile reference + 60 shore sealing silicone

Recommended groove dimensions calculation is based on the following data :

Average seal compression : 15%
Groove fill rate : 92%